


Ecoplus Interior Emulsion

Ecoplus Interior Emulsion is a regular acrylic emulsion paint for internal walls. Its time-tested formula gives a durable and smooth finish to your home walls. It is available in wide range of shades.



Product Features:

Pack size

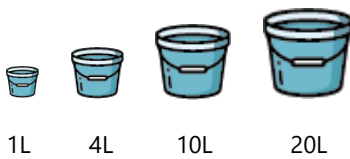

Colours Available



More than 1000 shades

Coverage

50 – 61 Sq.ft./L/2 coats

Pre-Painting Steps:

Cleaning



Filling cracks



New Plastered surfaces- It should be allowed to cure for at least 3 months prior to painting.

Old Surface / Previously painted surface - Clean thoroughly with wire-brush to remove loose/flaky material, grease, and dirt. Ensure that the surface is free from fungus, algae and moisture. Rectify and smoothen minor cracks and uneven surface with WALLPLUS Putty followed by two coats of WALLPLUS Water Primer. Fill the bigger cracks using cement & sand mixture in the ratio of 2:3.

Application Procedure:

Mix 3 part of ECOPLUS INTERIOR EMULSION with 1 part of clean water by volume. Avoid under thinning or over thinning of paint. Stir the mixed paint properly before use. Use a good quality paint brush, roller or spray gun for painting. Apply minimum two coats of Ecoplus Interior emulsion with a time gap of 4 to 6 hrs. between successive coats. After taking out the required quantity the lid of the container must be closed tightly. For darker shades, apply 3 to 4 coats of paints for better finish.

Recommended tools for application:



Brush



Roller



Spray

Technical Details:

- > Drying Time (touch dry): 30 minutes
- > Finish: Smooth
- > Sheen level: 2 to 5 GU at 60°
- > Stability of thinned paint: To be used within 24 hours.
- > Washability: Medium
- > Shelf Life: 36 months

PRECAUTIONS:

- > Please refer to MSDS of the paint for information on safety measures while handling the paint.
- > Keep out of the reach of children.
- > Store the container with the lid tightly closed and in upright position in a cool and dry place.